

WandReader Scanner

Features

- All-metal case
- Advanced optics
- Audible indicator
- Fast and flexible data entry
- Quick and easy install
- Economical

Benefits

- Great for office and warehouse applications.
- Increased first time read rates.
- Signals good reads to operator.
- Scan bar codes into your DOS, Windows 3.1, 9x, 2000, ME, XP and NT applications.
- Simply plug the scanner between your keyboard and PC. That's it! Start scanning immediately. (Optional USB interface).
- Best scanner for the price conscious.



WandReader Specifications

PERFORMANCE

Depth of Field
Contact

Best Resolution
0.127mm (5mil)

Tilt Angle
45 degrees

Scan Rate
2.0" to 30"/second

ELECTRICAL

Light Source
660nm nm LED

Sensor
Photo Diode

Operating Voltage
+5 VDC +/-5%

Current Consumption
Working 65mA for 605 @ 5VCD
+/- 5%

35mA for 205

MECHANICAL

Dimensions
5.9" length, .5" diameter

Weight
6oz (170g) (without cable)

Cable
7' coiled

Mechanical Shock
5ft (1.5m) Drop onto
Concrete Surface

ENVIRONMENTAL

Operating Temperature
32°F to 122°F

Storage Temperature
-4°F to 140°F

Relative Humidity
0% to 95% non-condensing

Safety Certification
Conforms FCC class A and
CE requirements


INTERFACES

PC-XT/AT, PS/2, Notebook

USB Optional

SYMBOLOGIES

Code 39, Code 93, Code 128,
UCC-128, UPC-A, UPC-E,
EAN/JAN-8, EAN/JAN-13,
Interleaved 2 of 5, Codabar,
MSI Plessey

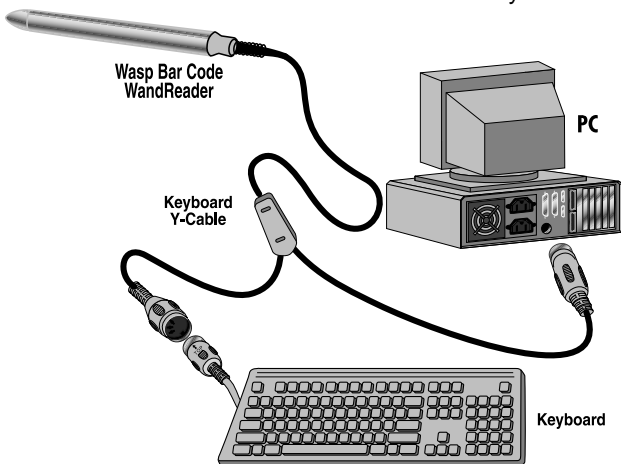

OUTER DIMENSIONS

